
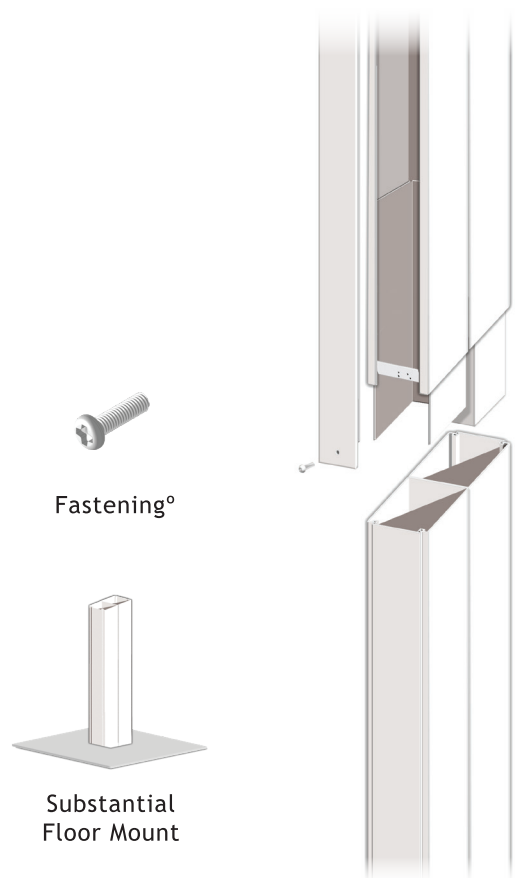


CAT 6A 2002/2E EXTENDED COLUMN PROFILE

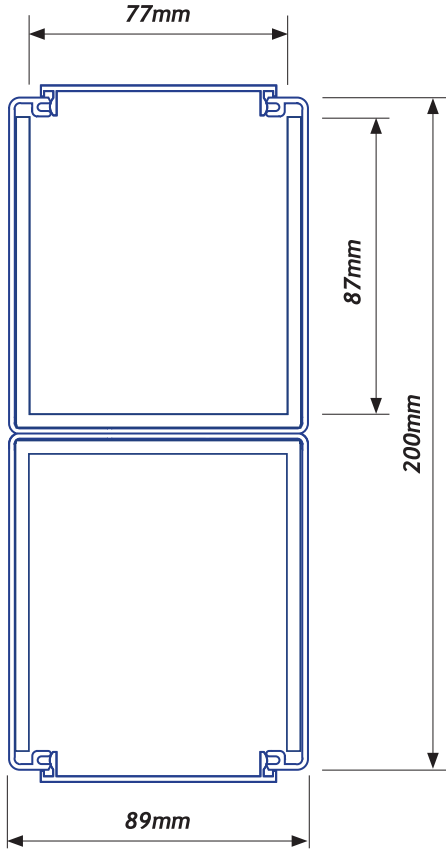

† Bespoke column height options available. 18 metres recommended maximum height. Contact Interserv to discuss your particular needs.

PROFILE LENGTHS †	PART No.
3.1 metre	CAT 6A 2002.2236
6.2 metre	CAT 6A 2002.2266

Includes covers + floor mount

ACCESSORIES*

FLOOR MOUNT	PART No.
Floor Mounting Bracket	10.0090



COMPRESSION JACKS	PART No.
300mm	15.3000
600mm	15.6000



FIXING PLATES	PART No.
70mm Large Outlet PAIR	70.0040



FINISHING FLANGE	PART No.
PVC Ceiling Flange	2002.2256



° Lid fastenings used on secondary column section lids for safety. Fastenings can be colour matched. Security puzzle screws available.



COMPLIANCE: AS/NZS 3000
FIRE HAZARD: AS1530 PT3 1999
SEALING: AS 60529-2004

*IMAGES ARE NOT TO SCALE / PROPORTION

0800 828 914
15 Patiki Road, Avondale, Auckland, NZ

www.interserv.co.nz